



# technical specifications CRMSC-SRHV

## general

- Reference-quality Digital Cinema ready surround sound system
- Unique voicing match with Alcons pro-ribbon loaded screen systems
- 1:1 non-compressed sound reproduction, with up to 90% less distortion
- RBN202 pro-ribbon HF driver with exceptional intelligibility and dynamic output
- SIS pre-wired for very high damping and further reduced distortion (with ALC)
- Patented horizontal and patent-pending vertical dispersion



## description

The CRMSC-SRHV surround is a 2-way passive-filtered full range loudspeaker, designed to meet all requirements of current and future cinema surround sound formats.

Featuring the patented Alcons pro-ribbon driver technology, the CRMSC-SRHV surround combines an exceptional clarity and intelligibility with an unusually high dynamic range, offering the most realistic sound reproduction possible.

The CRMSC-SRHV system consists of one RBN202 pro-ribbon driver for HF and a vented 6.5" mid-bass for LF reproduction. The CRMSC-SRHV HF section has an 400 W peak power input, enabling a 1:16 dynamic range with up to 90% less distortion from 1 kHz to beyond 20 kHz.

The patented (90-degrees) horizontal and patent-pending (60-degrees) vertical dispersion offers a wide and consistent coverage to a larger number of seats in the auditorium; Due to the "compression-less" principle of the pro-ribbon transducer, the system has a linear response at any SPL.

The CRMSC-SRHV is designed as matching (height layer) surround system for the CRMSC system: By utilizing identical MHF components, a perfect voicing matching between screen- and surround system is realized, resulting in an exceptionally wide and uniform sound stage throughout the entire listening area.

The revolvable RBN waveguide and trapezoidal enclosure together with the optional grill and ACO™ color option, provides for easy, low profile wall or ceiling mounting.


For full system performance, the CRMSC-SRHV needs to be driven by an ALC controller-amplifier, delivering maximum sound quality with increased headroom and utmost operation reliability.

The Signal Integrity Sensing™ pre-wiring ensures complete cable/connector compensation between the CRMSC-SRHOR and ALC, significantly increasing response accuracy, regardless of cable length and system impedance, with tight and accurate mid and bass response as result.

Typical applications include surround sound system for premium Home Cinemas, high-end mix/screening rooms, quality-conscious post-production facilities and dubbing stages. As a result of Alcons' tight manufacturing standards, all system cabinets are within “matched pair” tolerance.

# technical specifications CRMSC-SRHV

## dimensional drawing

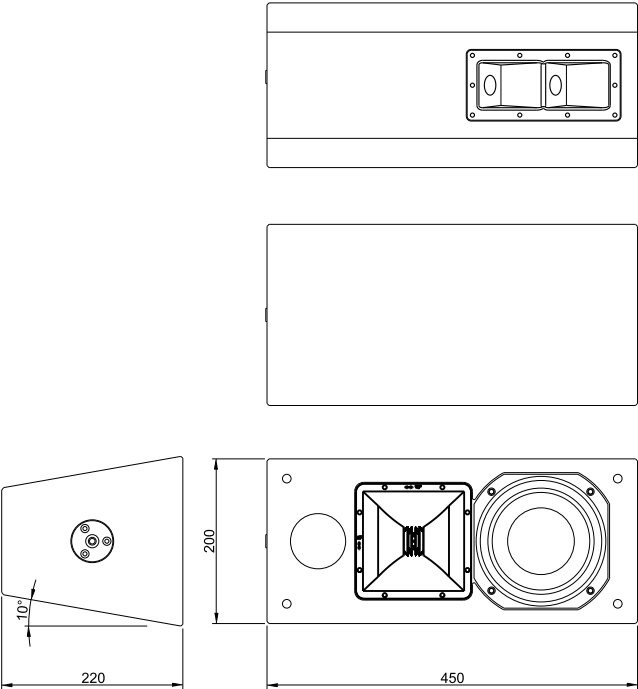

## technical specifications

Frequency response	66 Hz - 20.000 Hz	(+/- 3 dB)
	54 Hz	- (+/- 10 dB)
Sensitivity nominal	97 dB (200 Hz - 10 kHz)	
Nominal impedance	4 ohms or 8 ohms	
Recommended drive	Sentinel3 min., max. 3 pcs. per	
	channel (2.7 ohms)	
Nominal SPL peak	122 dB (Sentinel3 200 Hz - 10 kHz)	
	128 dB (Sentinel10 200 Hz - 10 kHz)	
Dispersion	90° x 60° (@ 20 kHz)	

## physical specifications

System	2-way, full-range	
Filtering	passive	
Drivers LF	1x AMB6.5 6.5", vented	
Drivers HF	1x RBN202rs 2" pro-ribbon driver	
Connectors	2x Speakon NL4 input/link	
Physical dimensions	mm	inches
	Height	200 7.9
	Width	450 17.7
Weight (approx.)	Depth	220 8.7
	Weight (approx.)	7,5 kg 16.5 lb
	Warranty	6 years limited

A: Alcons Audio B.V  
De Corantijn 69  
1689 AN Zwaag  
The Netherlands

E: info@alconsaudio.com  
W: www.alconsaudio.com  
T: +31 (0) 229 28 30 90  
F: +31 (0) 229 28 30 99